

## TILE ADHESIVE



## TECHNICAL DATA SHEET



# SCOPE

JINDAL Air Tile Adhesive is carefully proportioned cementitious mixture that high quality & well graded sand, cement, & High Performance which is used for Tile Fixing. It is selfcuring Polymer modified dry mortar.

## 1. PRELIMINARY WORKS AND SURFACE

- 1.1 Tiles surface and application surface should be well cleaned
- 1.2 Surface needs to be pre-wetted with water.

## 2. MIXING


- 2.1 The recommended mortar consists of 4 to 5 litres water for 20 kg Powder.
- 2.2 Mix well with a hand trowel for small volume.
- 2.3 For large volume mixing. A slow speed drill is recommended.



## 3. APPLICATION

- 3.1 Pre-soak the tiles with clean water and then allow surface to dry (Surface Saturated Dry – SSD).
- 3.2 Apply thin layer of a mortar Of Tile Adhesive using a “U” notched trowels on Tiles and application surface.

## 4. TILES FIXING

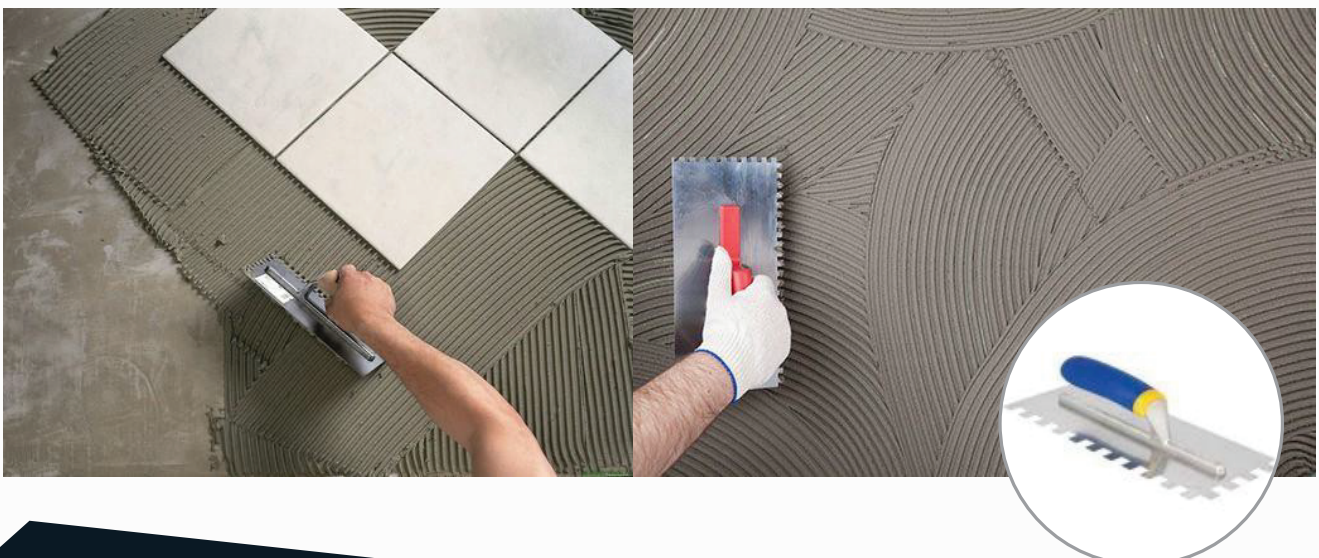







## 5. CURING

For most ambient conditions, no curing is required. In fast drying conditions such as direct sun or warm strong winds contacts, special curing like mist curing & spraying and temporary covering may be required.

For any further clarification don't hesitate to contact JINDAL Air Technical Department.

### Technical Department

The information, and, in particular, the recommendations relating to the application and end-use of JINDAL Air products, are given in good faith based on JINDAL Air current knowledge and experience of the products when properly stored, handled and applied under normal conditions. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users should always refer to the most recent issue of the Product Data Sheet for the product concerned, copies of which will be supplied on request.



---

Health & Safety: JINDAL Air Tile Adhesive is non-toxic. Use of gloves and goggles is recommended. Any splashes to the skin or eyes should be washed off with clean water. In the event of prolonged irritation, medical advice should be sought. JINDAL Air components are non-flammable.

**Manufacturing by:** Future Ecocrete Pvt. Ltd. Block #10 to 20, Israna Pardhana Road, Vill. Pardhana, PANIPAT

**Marketed by:** Peeco Agencies Pvt. Ltd. 901, The Palm square, sector – 66, Gurgaon (HR)